



● **11060 METAL SET**




● **Technical data:**

Dimensions	9,4 x 6,5 m
Safe zone	12,35 x 9,5 m
Total height	3,6 m
Free fall height	1,6 m
Age	3+
Conformity with PN-EN 1176	YES
Platform	1x 1,6 m; 1x 1,4 m; 1x 1,2 m; 5x 1,0 m; 3x 0,8 m
Slide	1x 1,6 m; 1x 1,4 m; 1x 1,2 m





● 11060 METAL SET

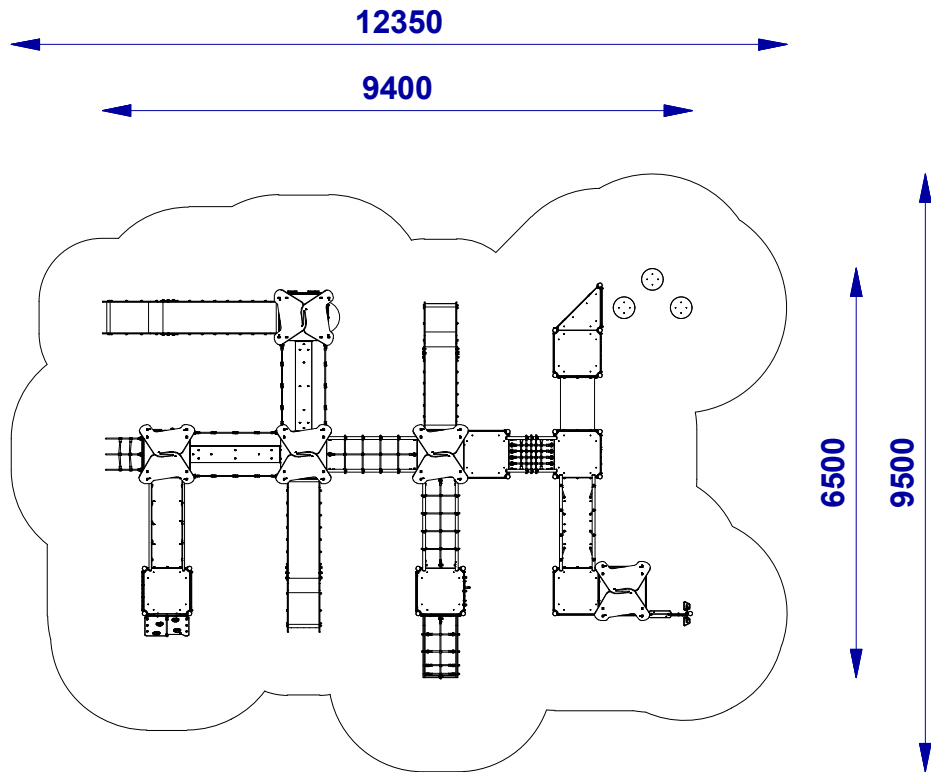

Set contents:	
Module:	Qty:
640.SR.HD.001 BP_WKL	4
640.SR.HD.004 D2_S	5
640.SR.HD.006 SKL	1
640.SR.HD.008 BO	2
640.SR.HD.009 BBUL	1
640.SR.HD.010 KIK	1
640.SR.HD.017 BSP	1
640.SR.HD.019 BZ	1
640.SR.HD.033 BBH45	1
640.SR.HD.046 BPL0T	2
640.SR.P.001 MLBH	1
640.SR.P.002.0200 MPLW_200	1
640.SR.P.002.0400 MPLW_400	1
640.SR.P.003.001 MT_K	1
640.SR.P.007.0200 ML_200	2
640.SR.P.011.0200 MLK_200	1
640.SR.P.015 MLBL	1
640.SR.P.022.0 G	3
640.SR.W.002.01000 WW_1000	1
640.SR.W.003.01200 SL_1200	1
640.SR.W.003.01400 SL_1400	1
640.SR.W.003.01600 SL_1600	1
640.SR.W.009.01600 WWP_1600	1
640.SR.W.012.01000 DWS_1000	4
640.SR.W.014.01000 WLL_1000	1
640.SR.W.021.01000 WL_1000	1
640.SR.WR.001.01000 W4D_1000	2
640.SR.WR.001.01200 W4D_1200	1
640.SR.WR.001.01400 W4D_1400	1
640.SR.WR.001.01600 W4D_1600	1
640.SR.WR.002.00800 W4_800	3
640.SR.WR.002.01000 W4_1000	3
640.SR.WR.004.00800 W3_800	1

Construction	Galvanized and powder coated steel	✓
	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	
Connectors	Stainless and galvanized	✓
	Polyethylene plastic (HDPE)	✓
	Polycarbonate (PC)	✓
Decorative elements	Hardwood plywood painted with certified chalkboard paint	✓
	Galvanized and powder coated steel	✓
	Stainless steel	✓
Metal elements	Stainless steel with polyethylene plastic (HDPE)	✓
	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Slide	Polypropylene rope with steel core	✓
	Aluminum and polyamide	✓
Ropes	Polyamide	✓
Rope connectors	Polyethylene plastic (HDPE) with antiskid layer	✓
Caps	Grooved board made of solid wood	✓
	Construction elements - 800 mm in ground	✓
Platforms	Powder coated steel post - 800 mm in ground	
	Stainless steel	
Anchoring	Galvanized steel	
	Stainless steel with bearings	
Chain	Flat with aluminum core, covered with rubber, certified	
	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Slings	20 x 200 x 400 mm - certified	
Seats		
Spring		

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Material	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Bark	20 - 80	200	≤2000
		300	≤3000
Wood chips	5 - 30	200	≤2000
		300	≤3000
Sand	0,25 - 8	200	≤2000
		300	≤3000
Gravel	0,25 - 8	200	≤2000
		300	≤3000
Other	as tested to HIC (see EN 1177)		as tested

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).

Proposal visualisation. Colors can be different. Ask for available options.