11142 METAL SET

Technical data:

Dimensions	5,7 x 3,65 m
Safe zone	8,2 x 6,65 m
Total height	2,4 m
Free fall height	1,2 m
Age	1+
Conformity with PN-EN 1176	YES
Platform	1x 1,2 m; 1x 1,0 m; 1x 0,8 m; 2x 0,4 m; 1x 0,2 m
Slide	1x 1,2 m

11142 METAL SET

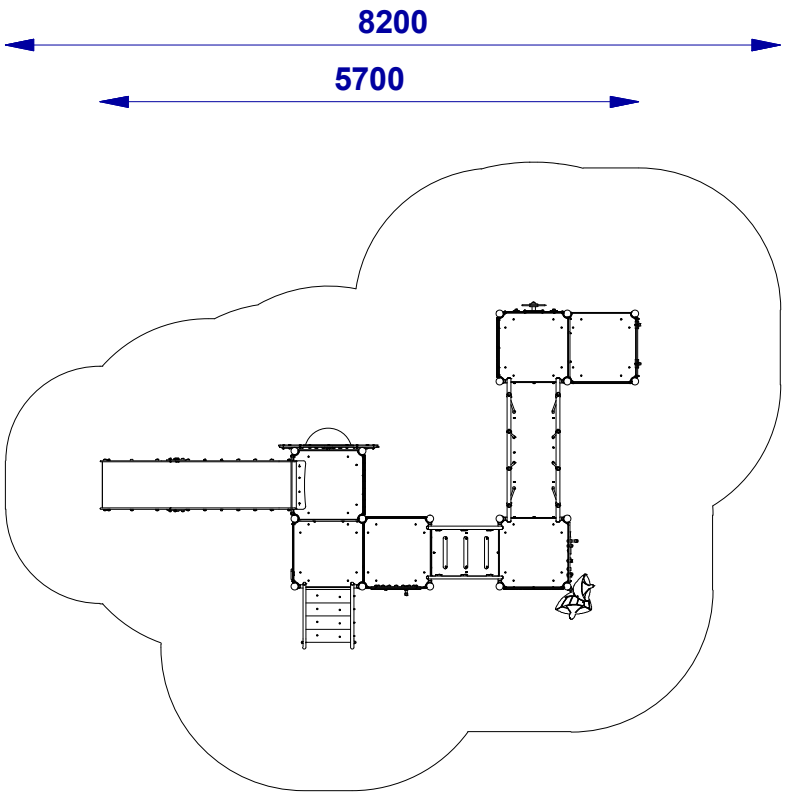

Set contents:	
Module:	Qty:
640.SR.HD.001 BP_WKL	1
640.SR.HD.010 KIK	1
640.SR.HD.014 BS	1
640.SR.HD.015 BKL	1
640.SR.HD.024 BKA	1
640.SR.HD.026 BKOS	1
640.SR.HD.044 BP_WKL_400	1
640.SR.HD.058 BST	1
640.SR.HD.059 R	1
640.SR.P.009.00400 MBHK_400	1
640.SR.P.015.0 MLBL	1
640.SR.W.003.01200 SL_1200	1
640.SR.W.007.01000 SCH_HD_1000	1
640.SR.W.017.01 WOO	2
640.SR.WR.002.00200 W4_200	1
640.SR.WR.002.00400 W4_400	2
640.SR.WR.002.00800 W4_800	1
640.SR.WR.002.01000 W4_1000	1
640.SR.WR.002.01200 W4_1200	1

Construction	Galvanized and powder coated steel	✓
	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	
Connectors	Stainless and galvanized	✓
Decorative elements	Polyethylene plastic (HDPE)	✓
	Polycarbonate (PC)	✓
	Hardwood plywood painted with certified chalkboard paint	
Metal elements	Galvanized and powder coated steel	✓
	Stainless steel	✓
Slide	Stainless steel with polyethylene plastic (HDPE)	✓
	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Ropes	Polypropylene rope with steel core	
Rope connectors	Aluminum and polyamide	
Caps	Polyamide	✓
Platforms	Polyethylene plastic (HDPE) with antiskid layer	✓
	Grooved board made of solid wood	
Anchoring	Construction elements - 800 mm in ground	✓
	Powder coated steel post - 800 mm in ground	
Chain	Stainless steel	
	Galvanized steel	
Slings	Stainless steel with bearings	
Seats	Flat with aluminum core, covered with rubber, certified	
	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Spring	20 x 200 x 400 mm - certified	

Proposal visualisation. Colors can be different. Ask for available options.

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Material	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Bark	20 - 80	200	≤2000
		300	≤3000
Wood chips	5 - 30	200	≤2000
		300	≤3000
Sand	0,25 - 8	200	≤2000
		300	≤3000
Gravel	0,25 - 8	200	≤2000
		300	≤3000
Other	as tested to HIC (see EN 1177)		as tested

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).