Technical Information



•11124 METAL SET



• Technical data:


Dimensions	5,6 x 3,8 m	
Safe zone	7,15 x 7,5 m	
Total height	3,5 m	
Free fall height	1,6 m	
Age	3+	
Conformity with PN-EN	1176 YES	
Platform	1x 1,4 m; 1x 1,2 m	
Slide	1x 1,4 m	



Technical Information



•11124 METAL SET

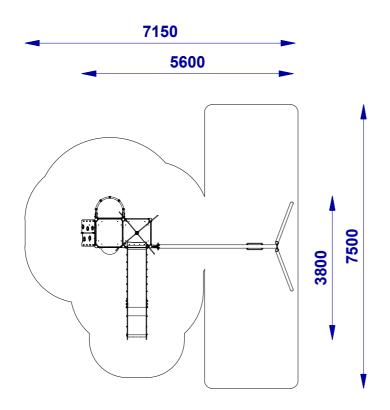

Set contents:		
Module:	Qty:	
640.SR.HD.001 BP_WKL	2	
640.SR.HD.009 BBUL	1	
640.SR.HD.043 DX	1	
640.SR.W.002.01200 WW_1200	1	
640.SR.W.003.01400 SL_1400	1	
640.SR.W.016.01 H1	1	
640.SR.W.018.01200 PTL_1200	1	
640.SR.WR.001.01400 W4D_1400	1	
640.SR.WR.002.01200 W4_1200	1	

	Galvanized and powder coated steel	√	
Construction	Stainless steel		
	Square 90x90 glued laminated timber, impregnated		
Connectors	Stainless and galvanized		
Decorative elements	Polyethylene plastic (HDPE)	√	
	Polycarbonate (PC)	√	
Cicilicitis	Hardwood plywood painted with certified chalkboard paint		
Metal	Galvanized and powder coated steel	√	
elements	Stainless steel	√	
	Stainless steel with polyethylene plastic (HDPE)	√	
Slide	Whole polyethylene plastic (LLDPE)		
	Whole stainless steel		
Ropes	Polypropylene rope with steel core	√	
Rope connectors	Aluminum and polyamide	√	
Caps	Polyamide	√	
Dietferme	Polyethylene plastic (HDPE) with antiskid layer	√	
Platforms	Grooved board made of solid wood		
Anchoring	Construction elements - 800 mm in ground	√	
	Powder coated steel post - 800 mm in ground		
a	Stainless steel	√	
Chain	Galvanized steel		
Slings	Stainless steel with bearings		
Seats	Flat with aluminum core, covered with rubber, certified	√	
	Bucket with aluminum core, covered with rubber, certified		
	Rope "Birds nest" with metal core, certified		
Spring	20 x 200 x 400 mm - certified		

 $\label{proposal} \mbox{Proposal visualisation. Colors can be different. Ask for available options.}$

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

absorbing surfaces.					
Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]		
Turf	-	-	≤1000		
Bark	20 - 80	200	≤2000		
Dark		300	≤3000		
Wood chips	5 - 30	200	≤2000		
		300	≤3000		
Sand 0,25 - 8	200	≤2000			
	300	≤3000			
Gravel 0,25 -	0.25 - 8	200	≤2000		
	0,20 - 0	300	≤3000		
Other	as tested to HIC (see EN 1177)		as tested		

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).