## **Technical Information**



# •11033 METAL SET



### Technical data:


Dimensions	7,8 x 5,9 m
Safe zone	10,3 x 8,4 m
Total height	3,0 m
Free fall height	1,75 m
Age	3+
<b>Conformity with PN-EN 1176</b>	YES
Platform	4x 1,0 m
Slide	2x 1,0 m



## **Technical Information**



## •11033 METAL SET

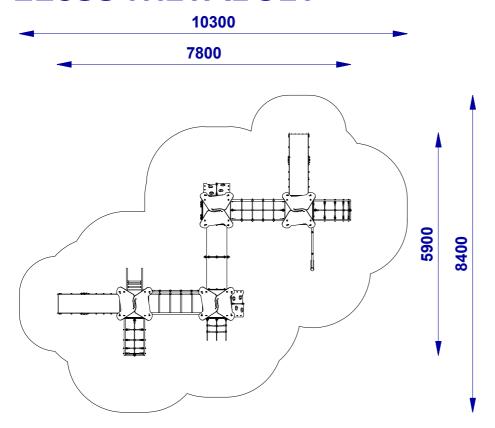

Set contents:			
Module:	Qty:		
640.SR.HD.001 BP_WKL	1		
640.SR.HD.004 D2_S	4		
640.SR.P.003.002 MT_D	1		
640.SR.P.007.0 ML	1		
640.SR.P.010.01000 DPMSZ_1000	1		
640.SR.W.002.01000 WW_1000	2		
640.SR.W.003.01000 SL_1000	2		
640.SR.W.005.01000 WO_1000	1		
640.SR.W.006 PS6K	1		
640.SR.W.009.01000 WWP_1000	1		
640.SR.W.014.01000 WLL_1000	2		
640.SR.W.021.01000 WL_1000	1		
640.SR.WR.001.01000 W4D_1000	4		

	Galvanized and powder coated steel	<b>√</b>
Construction	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	
Connectors	Stainless and galvanized	<b>√</b>
Decorative elements	Polyethylene plastic (HDPE)	<b>√</b>
	Polycarbonate (PC)	
elefficitis	Hardwood plywood painted with certified chalkboard paint	
Metal	Galvanized and powder coated steel	<b>√</b>
elements	Stainless steel	<b>√</b>
	Stainless steel with polyethylene plastic (HDPE)	<b>√</b>
Slide	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Ropes	Polypropylene rope with steel core	<b>√</b>
Rope connectors	Aluminum and polyamide	<b>√</b>
Caps	Polyamide	
- · · ·	Polyethylene plastic (HDPE) with antiskid layer	<b>√</b>
Platforms	Grooved board made of solid wood	
A I	Construction elements - 800 mm in ground	<b>√</b>
Anchoring	Powder coated steel post - 800 mm in ground	
a	Stainless steel	
Chain	Galvanized steel	
Slings	Stainless steel with bearings	
	Flat with aluminum core, covered with rubber, certified	
Seats	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Spring	20 x 200 x 400 mm - certified	

 $\label{thm:colors} \mbox{Proposal visualisation. Colors can be different. Ask for available options.}$ 

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

absorbing surfaces.					
Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]		
Turf	-	-	≤1000		
Bark	20 - 80	200	≤2000		
Dark		300	≤3000		
Wood chips	5 - 30	200	≤2000		
		300	≤3000		
Sand 0,25 - 8	200	≤2000			
	0,23 - 0	300	≤3000		
Gravel	0,25 - 8	200	≤2000		
		300	≤3000		
Other	as tested to HIC (see EN 1177)		as tested		

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).