### **Technical Information**



# • 10002 WOODEN SET




#### • Technical data:

Dimensions	2,45 x 1,45 m
Safe zone	4,95 x 4,45 m
Total height	1,8 m
Free fall height	1,0 m
Age	1+
<b>Conformity with PN-EN 1176</b>	YES
Platform	1x 1,0 m
Slide	1x 1,0 m

### **Technical Information**



## • 10002 WOODEN SET

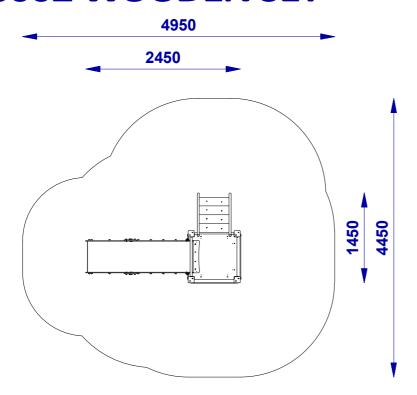

Set contents:		
Module:	Qty:	
640.S.HD.001 BP_WKL	2	
640.S.W.003.01000 SL_1000	1	
640.S.WD.002.01000 W4_1000	1	
640.S.W.007.01000 SCH_HD_1000	1	

	Galvanized and powder coated steel		
Construction	Stainless steel		
Concadan	Square 90x90 glued laminated timber, impregnated		
Connectors	Stainless and galvanized		
Decorative elements	Polyethylene plastic (HDPE)	<b>√</b>	
	Polycarbonate (PC)		
	Hardwood plywood painted with certified chalkboard paint		
Metal	Galvanized and powder coated steel	<b>√</b>	
elements	Stainless steel	<b>√</b>	
Slide	Stainless steel with polyethylene plastic (HDPE)	<b>√</b>	
	Whole polyethylene plastic (LLDPE)		
	Whole stainless steel		
Ropes	Polypropylene rope with steel core		
Rope connectors	Aluminum and polyamide		
Caps	Polyamide	<b>√</b>	
Platforms	Polyethylene plastic (HDPE) with antiskid layer	<b>√</b>	
	Anti-slip and waterproof plywood		
Anchoring	Construction elements - 800 mm in ground		
	Powder coated steel post - 800 mm in ground	<b>√</b>	
Chain	Stainless steel		
	Galvanized steel		
Slings	Stainless steel with bearings		
Seats	Flat with aluminum core, covered with rubber, certified		
	Bucket with aluminum core, covered with rubber, certified		
	Rope "Birds nest" with metal core, certified		
Spring	20 x 200 x 400 mm - certified		

 $\label{thm:colors} \mbox{Proposal visualisation. Colors can be different. Ask for available options.}$ 

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

absorbing duriaces.				
Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]	
Turf	-	-	≤1000	
Pork	Bark 20 - 80	200	≤2000	
Вагк		300	≤3000	
Wood chips	5 - 30	200	≤2000	
		300	≤3000	
Sand 0,25 - 8	0.25 - 8	200	≤2000	
	0,23 - 6	300	≤3000	
Gravel	0,25 - 8	200	≤2000	
		300	≤3000	
Other	as tested to HIC (see EN 1177)		as tested	

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).