



• 11079 METAL SET




• Technical data:

Dimensions	11,0 x 4,9 m
Safe zone	13,0 x 7,9 m
Total height	3,2 m
Free fall height	1,4 m
Age	3+
Conformity with PN-EN 1176	YES
Platform	1x 1,4 m; 3x 1,2 m; 4x 1,0 m; 3x 0,8 m
Slide	2x 1,2 m; 1x 1,0 m





● 11079 METAL SET

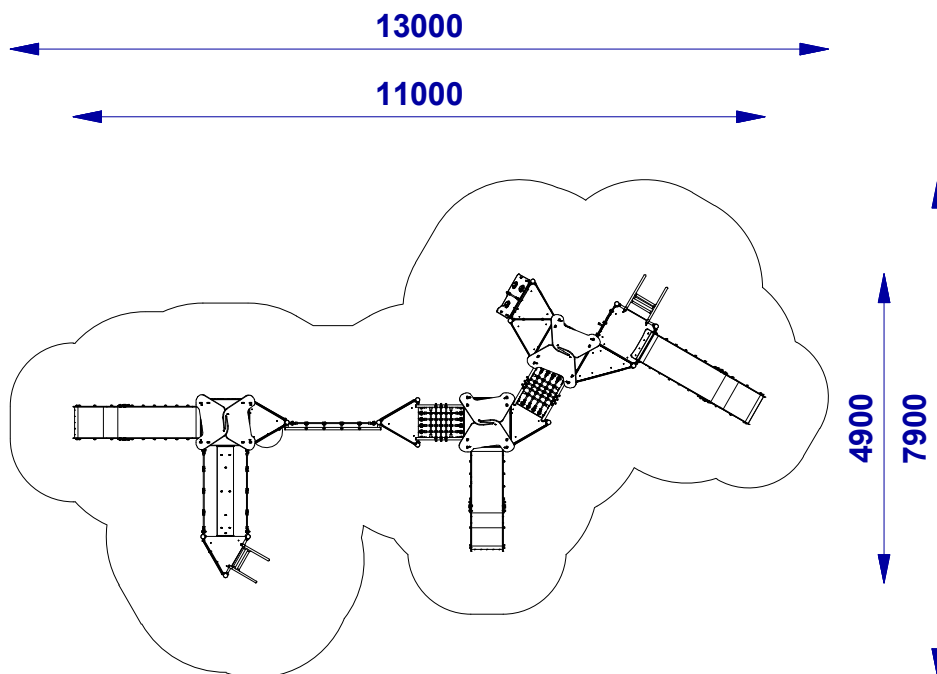

Set contents:	
Module:	Qty:
640.SR.HD.001 BP_WKL	1
640.SR.HD.004 D2_S	3
640.SR.HD.008 BO	1
640.SR.HD.009 BBUL	1
640.SR.HD.010 KIK	1
640.SR.HD.017 BSP	1
640.SR.HD.033 BBH45	1
640.SR.HD.044 BP_WKL_400	1
640.SR.HD.046 BPLOT	2
640.SR.P.002.0400 MPLW_400	1
640.SR.P.004.01200 MSZ_1200	1
640.SR.P.011.0 MLK	1
640.SR.P.011.0400 MLK_400	1
640.SR.W.002.00800 WW_800	1
640.SR.W.002.01200 WO_1200	1
640.SR.W.003.01000 SL_1000	1
640.SR.W.003.01200 SL_1200	2
640.SR.W.005.00800 WO_800	1
640.SR.W.011.01000 WO_HD_1000	1
640.SR.W.012.00800 DWS_800	1
640.SR.W.012.01000 DWS_1000	2
640.SR.WR.001.01000 W4D_1000	1
640.SR.WR.001.01200 W4D_1200	2
640.SR.WR.002.01200 W4_1200	1
640.SR.WR.004.01400 W3_1400	1
640.SR.WR.007.00800 W3R_800	3
640.SR.WR.007.01000 W3R_1000	3

Construction	Galvanized and powder coated steel	✓
	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	
Connectors	Stainless and galvanized	✓
	Polyethylene plastic (HDPE)	✓
	Polycarbonate (PC)	✓
Decorative elements	Hardwood plywood painted with certified chalkboard paint	
	Galvanized and powder coated steel	✓
	Stainless steel	✓
Metal elements	Stainless steel with polyethylene plastic (HDPE)	✓
	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Slide	Polypropylene rope with steel core	✓
	Aluminum and polyamide	✓
Ropes	Polyamide	✓
Rope connectors	Polyethylene plastic (HDPE) with antiskid layer	✓
Caps	Grooved board made of solid wood	✓
	Construction elements - 800 mm in ground	✓
Platforms	Powder coated steel post - 800 mm in ground	✓
	Stainless steel	
Anchoring	Galvanized steel	
	Stainless steel with bearings	
Chain	Flat with aluminum core, covered with rubber, certified	
	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Slings	20 x 200 x 400 mm - certified	
Seats		
Spring		

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Material	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Bark	20 - 80	200	≤2000
		300	≤3000
Wood chips	5 - 30	200	≤2000
		300	≤3000
Sand	0,25 - 8	200	≤2000
		300	≤3000
Gravel	0,25 - 8	200	≤2000
		300	≤3000
Other	as tested to HIC (see EN 1177)		as tested

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).

Proposal visualisation. Colors can be different. Ask for available options.