



● **10050 WOODEN SET**




● **Technical data:**

Dimensions	6,0 x 3,45 m
Safe zone	9,0 x 5,95 m
Total height	2,2 m
Free fall height	1,75 m
Age	3+
Conformity with PN-EN 1176	YES
Platform	3x 1,0 m
Slide	1x 1,0 m





● 10050 WOODEN SET

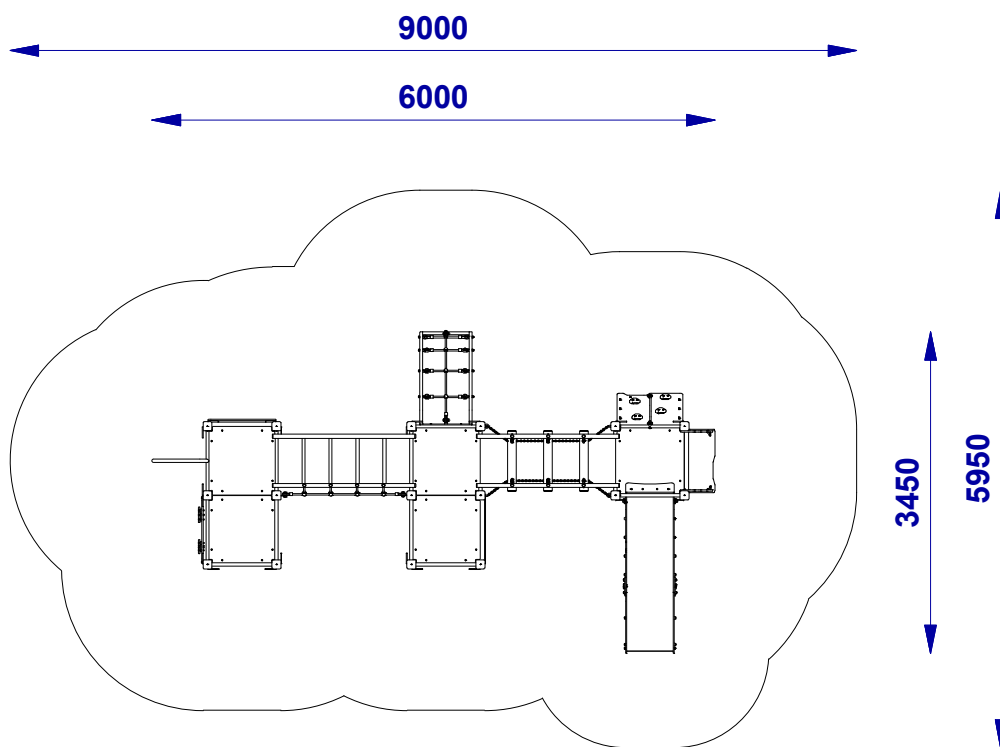

Set contents:	
Module:	Qty:
640.S.HD.001 BP_WKL	1
640.S.HD.003 BAL	1
640.S.P.010.01000 DPMSZ_1000	1
640.S.P.012.0 MLL	1
640.S.W.001.01000 RS_1000	1
640.S.W.002.01000 WW_1000	1
640.S.W.003.01000 SL_1000	1
640.S.W.009.01000 WWP_1000	1
640.S.W.011.01000 WO_HD_1000	1
640.S.W.012.01000 DWS_1000	4
640.S.W.014.01000 WLL_1000	1
640.S.WD.002.01000 W4_1000	5

Construction	Galvanized and powder coated steel	
	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	✓
Connectors	Stainless and galvanized	✓
		✓
Decorative elements	Polyethylene plastic (HDPE)	✓
	Polycarbonate (PC)	
	Hardwood plywood painted with certified chalkboard paint	
Metal elements	Galvanized and powder coated steel	✓
	Stainless steel	✓
Slide	Stainless steel with polyethylene plastic (HDPE)	✓
	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Ropes	Polypropylene rope with steel core	✓
Rope connectors	Aluminum and polyamide	✓
Caps	Polyamide	✓
Platforms	Polyethylene plastic (HDPE) with antiskid layer	
	Anti-slip and waterproof plywood	✓
Anchoring	Construction elements - 800 mm in ground	
	Powder coated steel post - 800 mm in ground	✓
Chain	Stainless steel	✓
	Galvanized steel	
Slings	Stainless steel with bearings	
Seats	Flat with aluminum core, covered with rubber, certified	
	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Spring	20 x 200 x 400 mm - certified	

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Material	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Bark	20 - 80	200	≤2000
		300	≤3000
Wood chips	5 - 30	200	≤2000
		300	≤3000
Sand	0,25 - 8	200	≤2000
		300	≤3000
Gravel	0,25 - 8	200	≤2000
		300	≤3000
Other	as tested to HIC (see EN 1177)		as tested

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).

Proposal visualisation. Colors can be different. Ask for available options.