



• 11077 METAL SET




• Technical data:

Dimensions	6,0 x 5,05 m
Safe zone	9,0 x 7,3 m
Total height	3,2 m
Free fall height	1,2 m
Age	1+
Conformity with PN-EN 1176	YES
Platform	1x 1,2 m; 2x 1,0 m; 3x 0,8 m; 1x 0,6 m
Slide	1x 1,0 m; 1x 0,8 m



● 11077 METAL SET

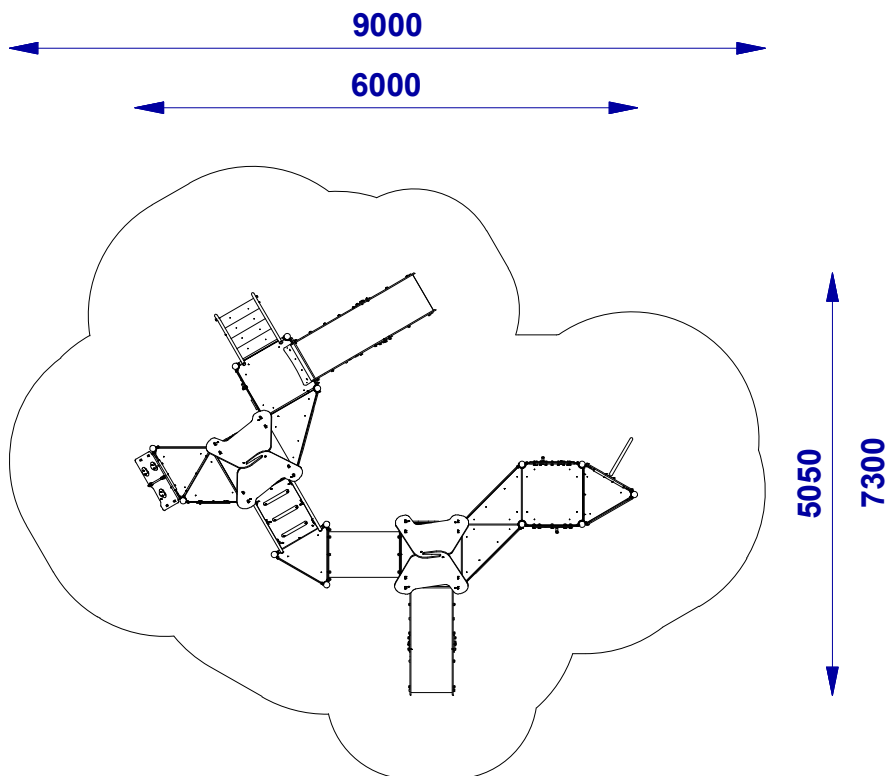

Set contents:

Module:	Qty:
640.SR.HD.001 BP_WKL	1
640.SR.HD.002 D2_S	2
640.SR.HD.008 BO	1
640.SR.HD.010 KIK	1
640.SR.HD.015 BKL	1
640.SR.HD.017 BSP	1
640.SR.HD.019 BZ	1
640.SR.HD.033 BBH45	3
640.SR.HD.044 BP_WKL_400	1
640.SR.HD.046 BPLOT	1
640.SR.P.003.001 MT_K	1
640.SR.P.009.00400 MBHK_400	1
640.SR.W.002.00800 WW_800	1
640.SR.W.003.00800 SL_800	1
640.SR.W.003.01000 SL_1000	1
640.SR.W.007.01000 SCH_HD_1000	1
640.SR.W.01.00600 RS_600	1
640.SR.W.012.00600 DWS_600	1
640.SR.WR.001.00800 W4D_800	1
640.SR.WR.001.01200 W4D_1200	1
640.SR.WR.002.00800 W4_800	1
640.SR.WR.002.01000 W4_1000	1
640.SR.WR.004.00800 W3_800	2
640.SR.WR.004.01200 W3_1200	1
640.SR.WR.007.00600 W3R_600	1
640.SR.WR.007.00800 W3R_800	2
640.SR.WR.007.01000 W3R_1000	1

Construction	Galvanized and powder coated steel	✓
	Stainless steel	
	Square 90x90 glued laminated timber, impregnated	
Connectors	Stainless and galvanized	✓
	Polyethylene plastic (HDPE)	✓
	Polycarbonate (PC)	✓
Decorative elements	Hardwood plywood painted with certified chalkboard paint	✓
	Galvanized and powder coated steel	✓
	Stainless steel	✓
Metal elements	Stainless steel with polyethylene plastic (HDPE)	✓
	Whole polyethylene plastic (LLDPE)	
	Whole stainless steel	
Slide	Polypropylene rope with steel core	✓
Ropes	Aluminum and polyamide	✓
Rope connectors	Polyamide	✓
Caps	Polyethylene plastic (HDPE) with antiskid layer	✓
Platforms	Grooved board made of solid wood	
	Construction elements - 800 mm in ground	✓
Anchoring	Powder coated steel post - 800 mm in ground	
	Stainless steel	
Chain	Galvanized steel	
Slings	Stainless steel with bearings	
Seats	Flat with aluminum core, covered with rubber, certified	
	Bucket with aluminum core, covered with rubber, certified	
	Rope "Birds nest" with metal core, certified	
Spring	20 x 200 x 400 mm - certified	

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

Material	Grain size [mm]	Depth [mm]	Critical fall height [mm]
Turf	-	-	≤1000
Bark	20 - 80	200	≤2000
		300	≤3000
Wood chips	5 - 30	200	≤2000
		300	≤3000
Sand	0,25 - 8	200	≤2000
		300	≤3000
Gravel	0,25 - 8	200	≤2000
		300	≤3000
Other	as tested to HIC (see EN 1177)		as tested

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).

Proposal visualisation. Colors can be different. Ask for available options.