Technical Information



•3505S (S_H6) HEXAGONAL SWING




• Technical data:

Dimensions	4,75 x 5,4 m
Safe zone	11,25 x 10,65 m
Total height	2,3 m
Free fall height	1,3 m
Age	3+
Conformity with PN-EN 117	76 YES

Technical Information



•3505S (S_H6) HEXAGONAL SWING

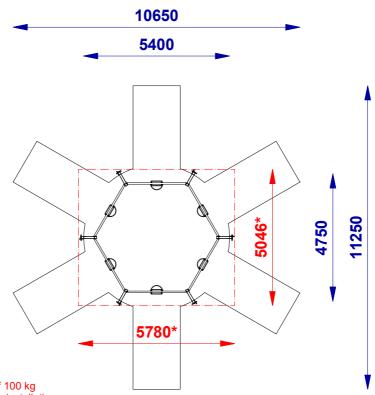

The "Bird nest" seat has a maximum working load of 100 kg
*The dimension that should be considered during the installation

"The almension th	at should be considered during the installation		
Construction	Galvanized and powder coated steel	- √	
	Stainless steel		
	Square 90x90 glued laminated timber, impregnated		
Connectors	Stainless and galvanized		
Decorative elements	Polyethylene plastic (HDPE)		
	Polycarbonate (PC)		
	Hardwood plywood painted with certified chalkboard paint		
Metal elements	Galvanized and powder coated steel	√	
	Stainless steel		
Slide	Stainless steel with polyethylene plastic (HDPE)		
	Whole polyethylene plastic (LLDPE)		
	Whole stainless steel		
Ropes	Polypropylene rope with steel core		
Rope connectors	Aluminum and polyamide		
Caps	Polyamide	√	
Platforms	Polyethylene plastic (HDPE) with antiskid layer		
	Grooved board made of solid wood		
Anchoring	Construction elements - 800 mm in ground	√	
	Powder coated steel post - 800 mm in ground		
Chain	Stainless steel	√	
	Galvanized steel		
Slings	Stainless steel with bearings	√	
Seats	Flat with aluminum core, covered with rubber, certified	1	
	Bucket with aluminum core, covered with rubber, certified		
	Rope "Birds nest" with metal core, certified		
Spring	20 x 200 x 400 mm - certified		

 $\label{proposal visualisation. Colors can be different. Ask for available options.$

In relation to free fall height / HIC, norm PN-EN 1176-1 allow the following impact absorbing surfaces.

absorbing surfaces.					
Materiał	Grain size [mm]	Depth [mm]	Critical fall height [mm]		
Turf	-	-	≤1000		
Bark	20 - 80	200	≤2000		
		300	≤3000		
Wood chips	5 - 30	200	≤2000		
		300	≤3000		
Sand	0,25 - 8	200	≤2000		
		300	≤3000		
Gravel	0,25 - 8	200	≤2000		
		300	≤3000		
Other	as tested to HIC	(see EN 1177)	as tested		

It is required to put particular emphasis on the level of loose surface material, fill in to the proper level regularly and remove the items that may cause injury (glass, loose stones, sticks and other loose objects).